

**Low Cost SPDT Switch DC-3GHZ/10W**

P/N: O1S21203




**RF SPEC.**

Frequency Range	DC-1GHZ	1-2GHZ	2-3GHZ
VSWR	<1.15	<1.25	<1.40
Insertion Loss	<0.15dB	<0.40dB	<0.50dB
Isolation	>60dB	>50dB	>40dB
Power Handling(CW)	10W@1GHZ		

- . Impedance:50 ohm (Option:75 ohm)
- . Failsafe Type(Option:Latching)
- . Work Voltage:DC12V(9-18V)/15mA (Option 5V,9V,24V)
- . Switching Time:<5ms
- . Life:>100000 Cycles @ 1GHZ 10W  
>300000 Cycles @1GHZ 1W
- . Operating Temperture:-40 ~ +70°C
- . Size:25X30X17.5mm(LXWXH) with SMA connectors
- . Interface: SMA female(Option: BNC,N,MCX,MMCX etc.)

**SIZE:**

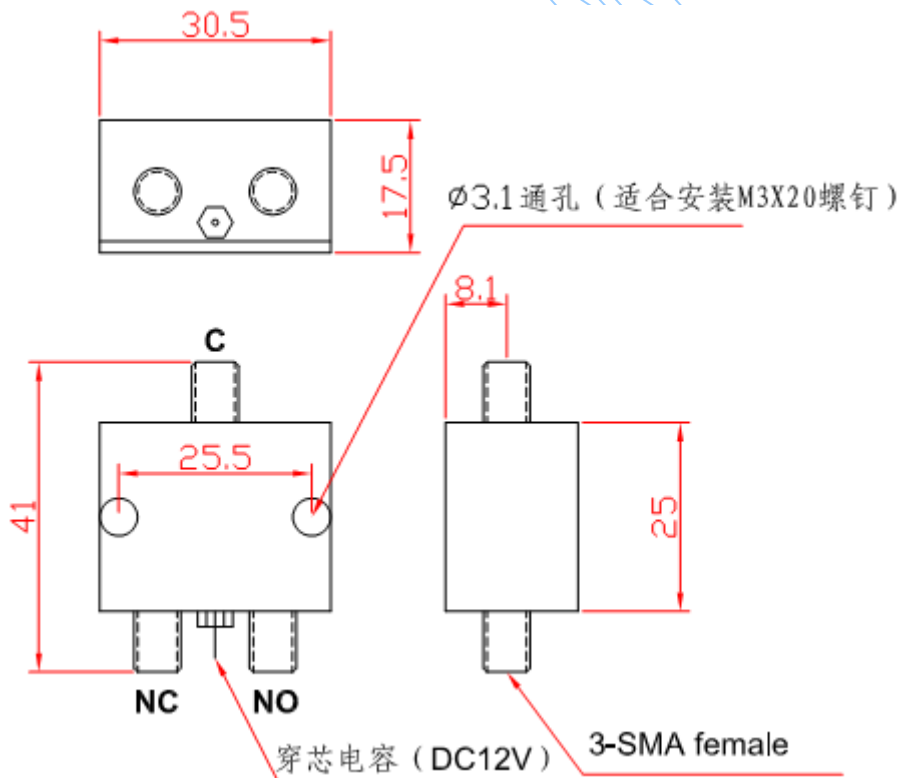

Tel :0086-10-82087227

Fax:0086-10-82087380

E-mail: rfswitch@126.com

Web site: www.rf-switch.com