
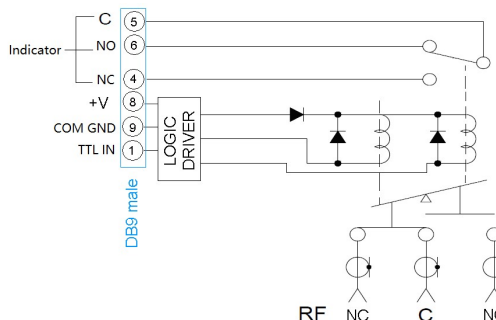


Frequency Range	Insertion Loss	VSWR	Isolation	Power Handling
DC-3GHZ	<0.20dB	<1.20	>80dB	85W
3-6GHZ	<0.30dB	<1.30	>70dB	60W
6-12.4GHZ	<0.40dB	<1.40	>65dB	40W
12.4-18GHZ	<0.50dB	<1.50	>60dB	20W

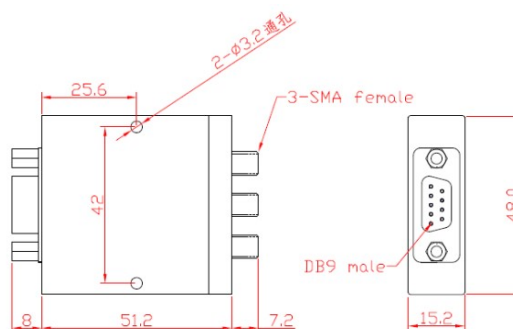

Series	Voltage	Frequency range	TTL Logic Control	Indicator	Option2
P/N: C20-					-V (Anti Vibration)
	1 2 DC12V	0 3 DC-3GHZ	NO TTL		-W (Splash)
	2 4 DC24V	0 6 DC-6GHZ	T With TTL		
	2 8 DC28V	1 2 DC-12GHZ			
		1 8 DC-18GHZ			