

SPEC.

SP4T Failsafe Type(Reflective)

Impedance: 75 ohm

Frequency Range:DC-1GHZ 1-2GHZ 2-3GHZ
 Insertion Loss: <0.3dB <0.5dB <1.1dB
 V.S.W.R <1.2 <1.4 <1.6
 Isolation: >60dB >50dB >40dB

Switching Time <10ms

Electronical Life >300000 (1W@1GHZ)

RF Power Handling:10W@1GHZ(Max.)

DC Handling: 24V/0.5A

Control Voltage:DC12V/60mA

Option:DC24V/60mA ; DC28V/60mA


Working Temperature: -40 - +70 Degree

RF Interface: BNC female P/N CUS1201

Option: F female P/N CUS1201F

RF Path

C2=C3=C4=0V, J0 to J1
 C2=12V,C3=C4=0V, J0 to J2
 C3=12V,C2=C4=0V, J0 to J3
 C4=12V,C2=C3=0V, J0 to J4

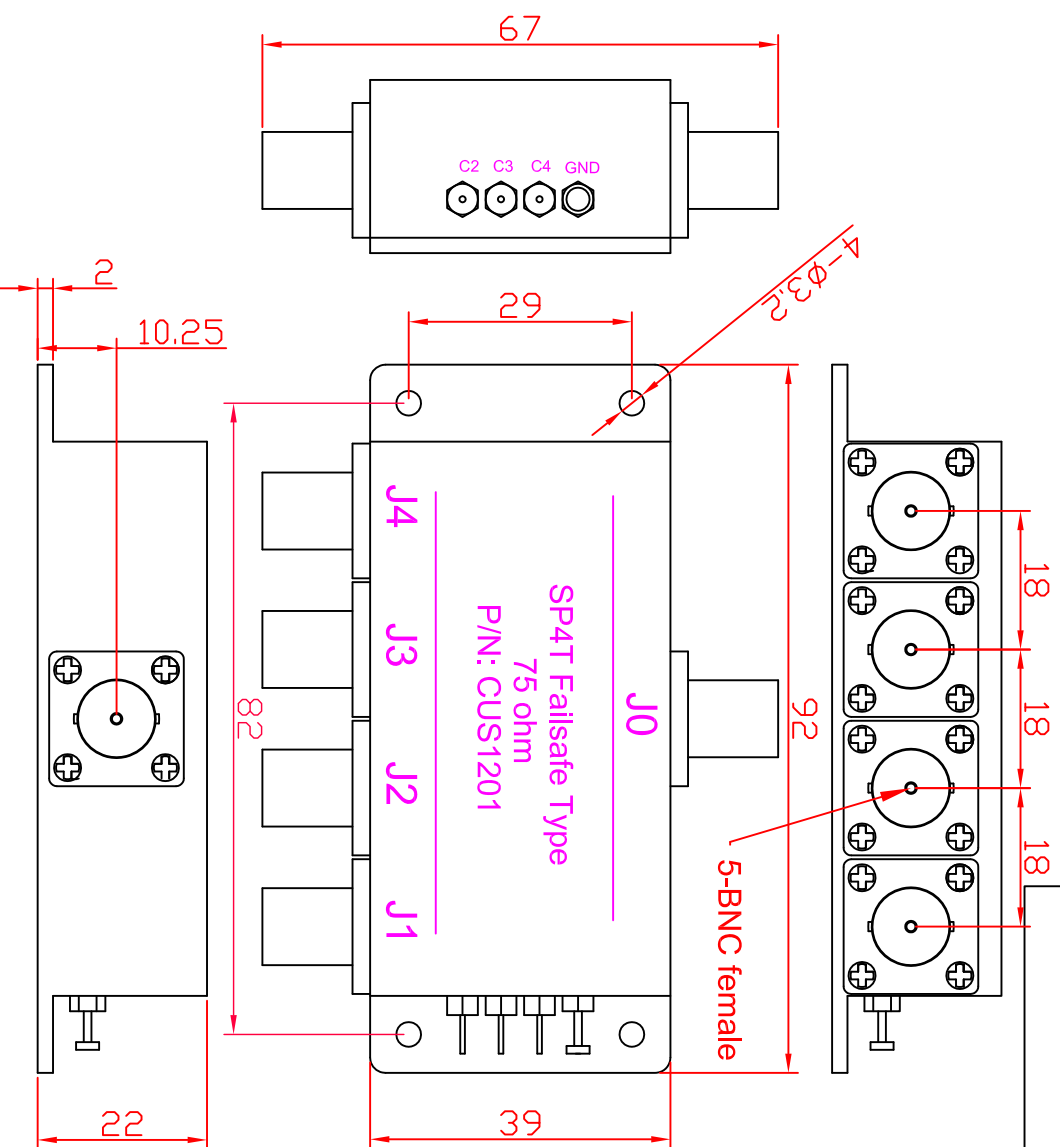

										SP4T Failsafe Type (Reflective) 75 ohm DC12V BNC female		材料	
												产品号	CUS1201
												图号	
标记	处数	(签名)	更改文件号	(日期)	绘图	(签名)	日期	阶段标记		比例	视图方向	北京亿通通信技术有限公司 Beijing CTE Communication	
设计					DICK YUAN		2012-1-30	A	B	C	1:1	第一张	
标准化					审核	Cindy	2012-1-31	共 1 张		第 1 张	版次	1	
工艺					批准	Lee	2012-1-31						